




Installation of the rear parcel shelf



1) Remove the back seat and position the front support (ref 2601102) on the top of the seat.

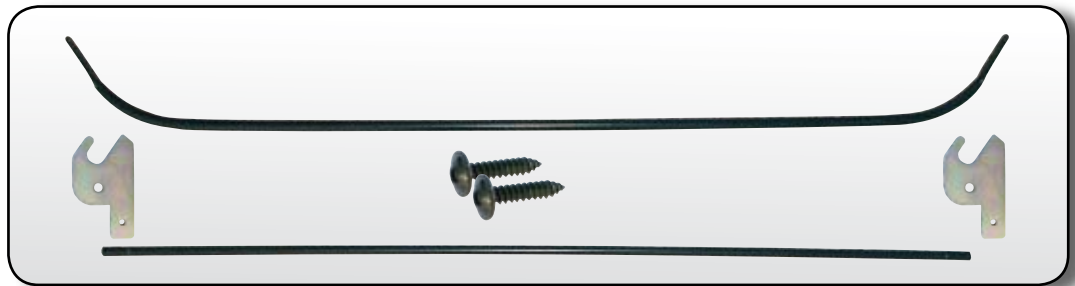

2/ Drill slowly the back seat frame, place the support in correct position (drilling diameter 2mm).



3/ Slip the front support inside rear shelf hem.



Mise en place de la plage arrière



4/ Fix the rear parcel shelf to the top of the seat, with 2 metal screws on the extremity.



5/ Slip the front support (ref 2601100) inside the rear shelf small hem.



6/ If the rear crossbar of your roof have some U indentation (see picture), insert directly your rear support into the indentation. The installation is over.



7/ If not fix right and left of the roof crossbar the supports (ref 2600100, see picture). The supports are pierce remove the holding nuts.

8/ The installation is over.

